THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH "L" +/- .3" [7]
Ⓐ	MLTFC4SH-LP316	4" [102]	50	17.1" [434]
Ⓐ	MLTFC6SH-LP316	6" [152]	50	23.4" [594]
Ⓐ	MLTFC8SH-LP316	8" [203]	50	29.7" [754]

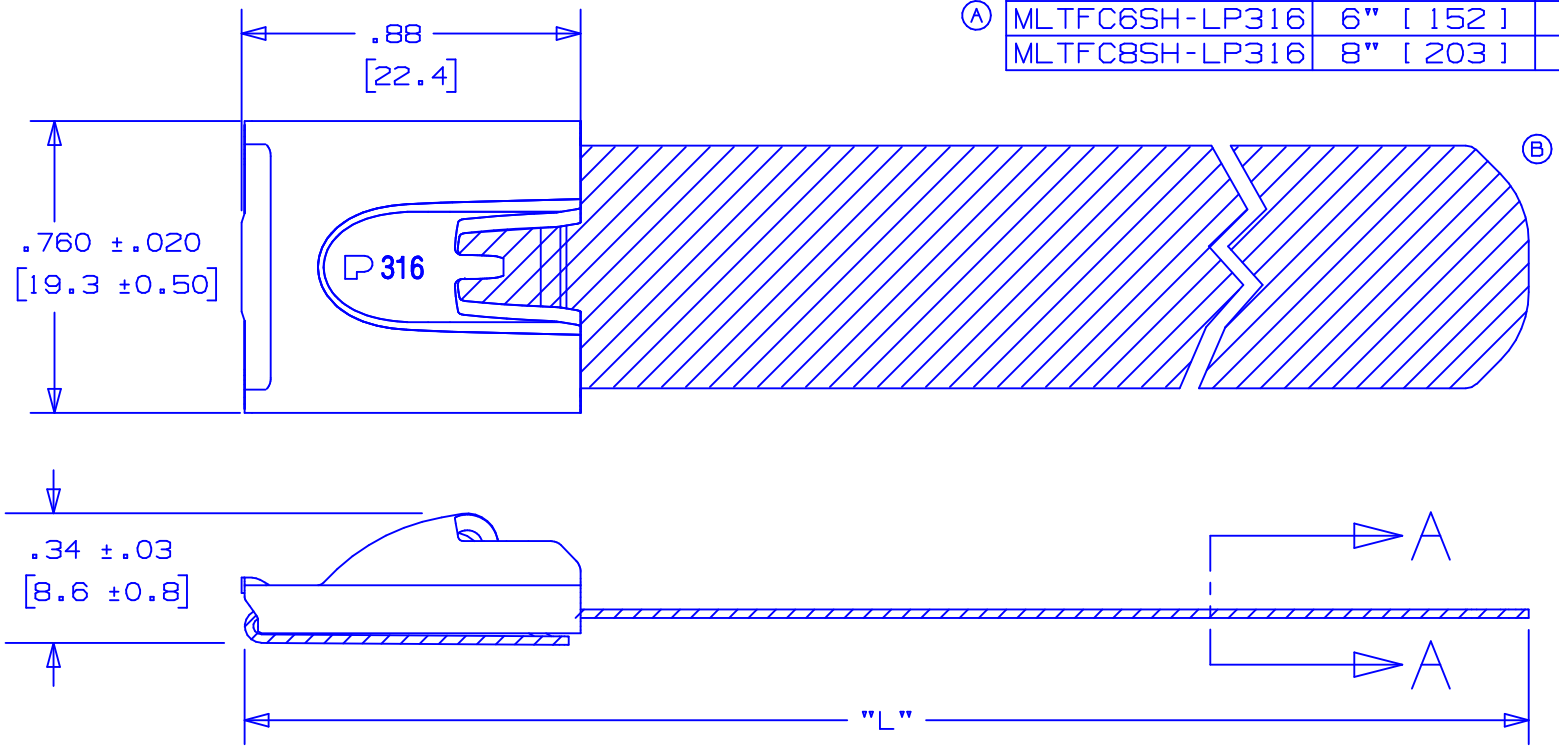

NOTES:
1. APPLICATION TOOLS - RT1HT
2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS. (2002 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. [ ] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
   .XXX = ±.010 [.25]
   .XX = ±.02 [.5]
   .X = ±.03 [.8]
   ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL
6. COATING - POLYESTER
   COATING THICKNESS: .002 MIN./.005 MAX. PER SIDE

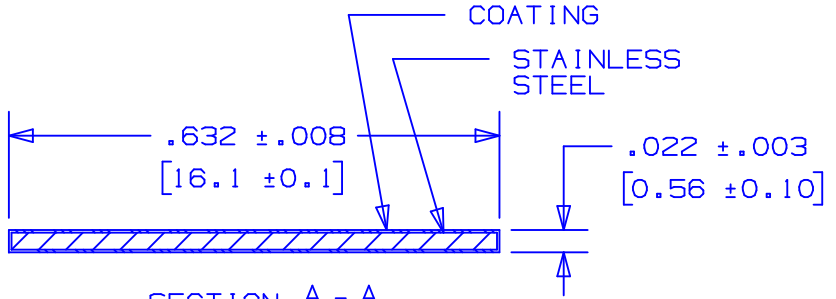

SECTION A - A
SCALE: 4x

S41201_02

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST
02	9/05	JAMB	EJD	Ⓑ ADDED NEW TIP CONFIGURATION	ECN# SS00048		
01	4/20	JMMR	EJD	Ⓐ MLTFC4SH-LP316 WAS MLT4FCSH-LP316 MLTFC6SH-LP316 WAS MLT6FCSH-LP316	12666	CCH	JJB
---	----	---	---	Ⓐ MLTFC8SH-LP316 WAS MLT8FCSH-LP316	-----	---	---
00	11/04	JMMR	EJD	DRAWING RELEASED	12196	CCH	JJB

PANDUIT CORP. TINLEY PARK, ILLINOIS

METAL LOCKING TIE SUPER HEAVY DUTY
FULLY COATED-316 STAINLESS STEEL
(CUSTOMER DRAWING)

DRAWN BY	CHK'D	SCALE	DRAWING NO.
JMMR	EJD	2x	S41201